Appendix 2
Cable drawings

REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
A	CREATION	GT	SW	22/06/01

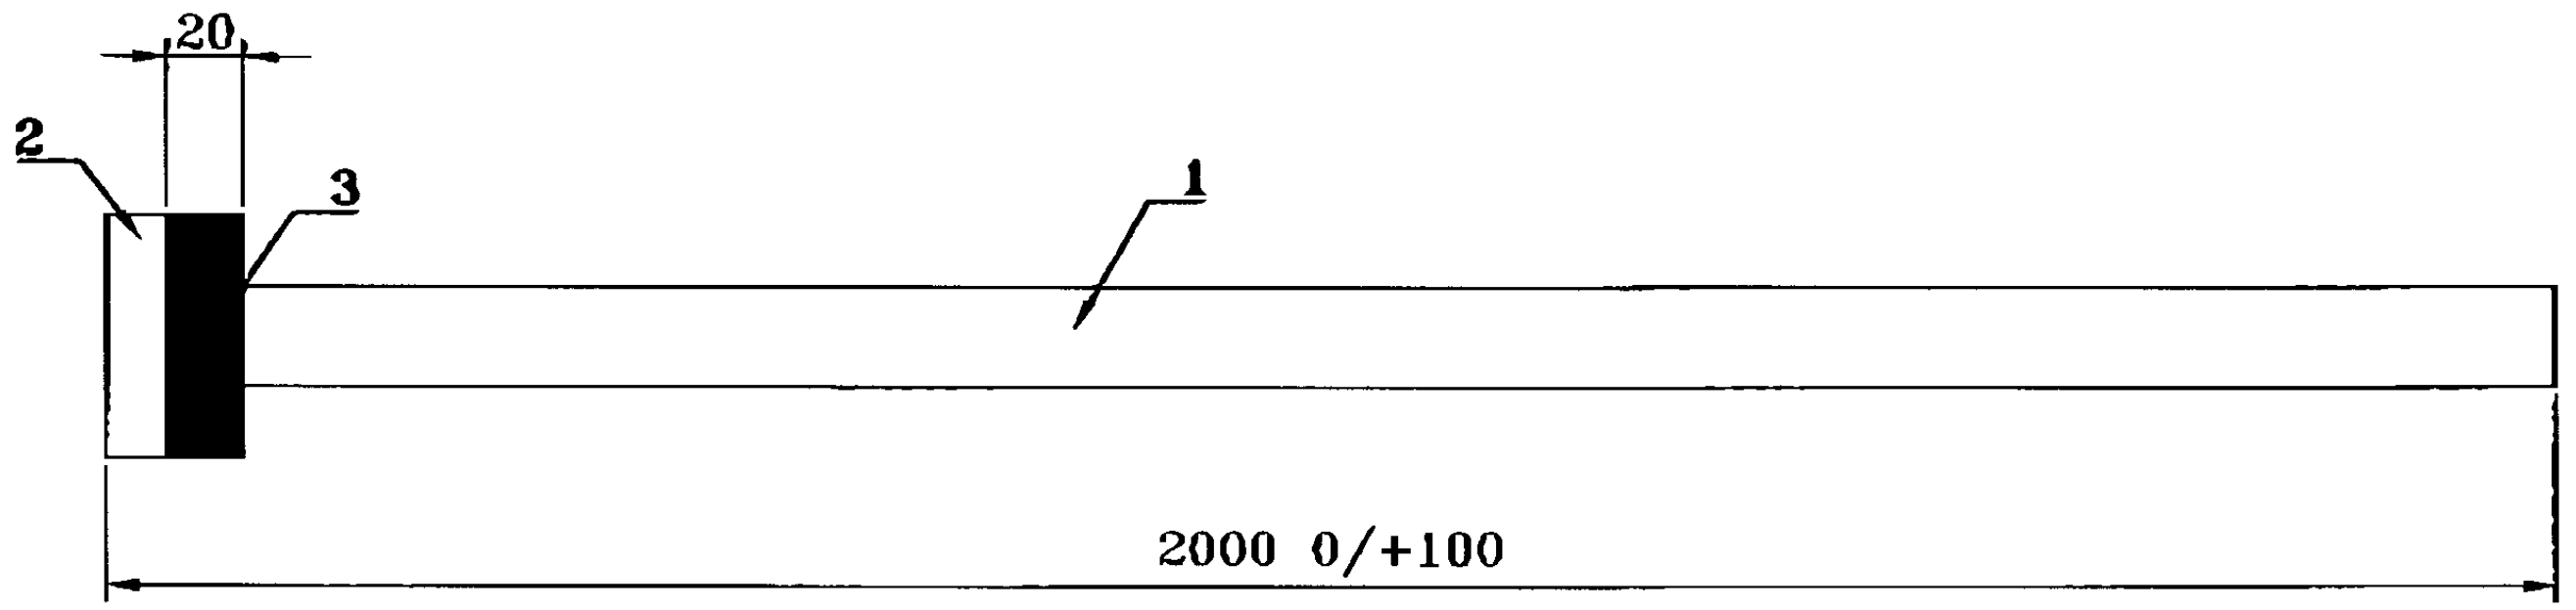

PARTS LIST :

1. Composite cable (2 x UHT 3207 LH) MAX 21 + drain wire
   See A7389A3
2. Connector dual row male
3. Molding
4. Label on the connector's molding
   Text : "AXON' P/N
   Date : YY/WW
   Batch Nb/Serial Nb"

PRELIMINARY DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : d.	axon' CABLE & INTERCONNECT	AXON'CABLE SA 51210 MONTMIRAIL - FRANCE TEL : +33 3 26 81 70 00 FAX : +33 3 26 81 28 83 www.axon-cable.com
CUSTOMER N° ***************	TITLE : HARNESS 2	
FILE N° A7389A2.dwg		
	SIZE A4 / SCALE :	AXON'SA N° A7389A2 / REV A Prod. Doc. / SHEET 1 of 1

REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
A	CREATION	GT	SW	22/06/01

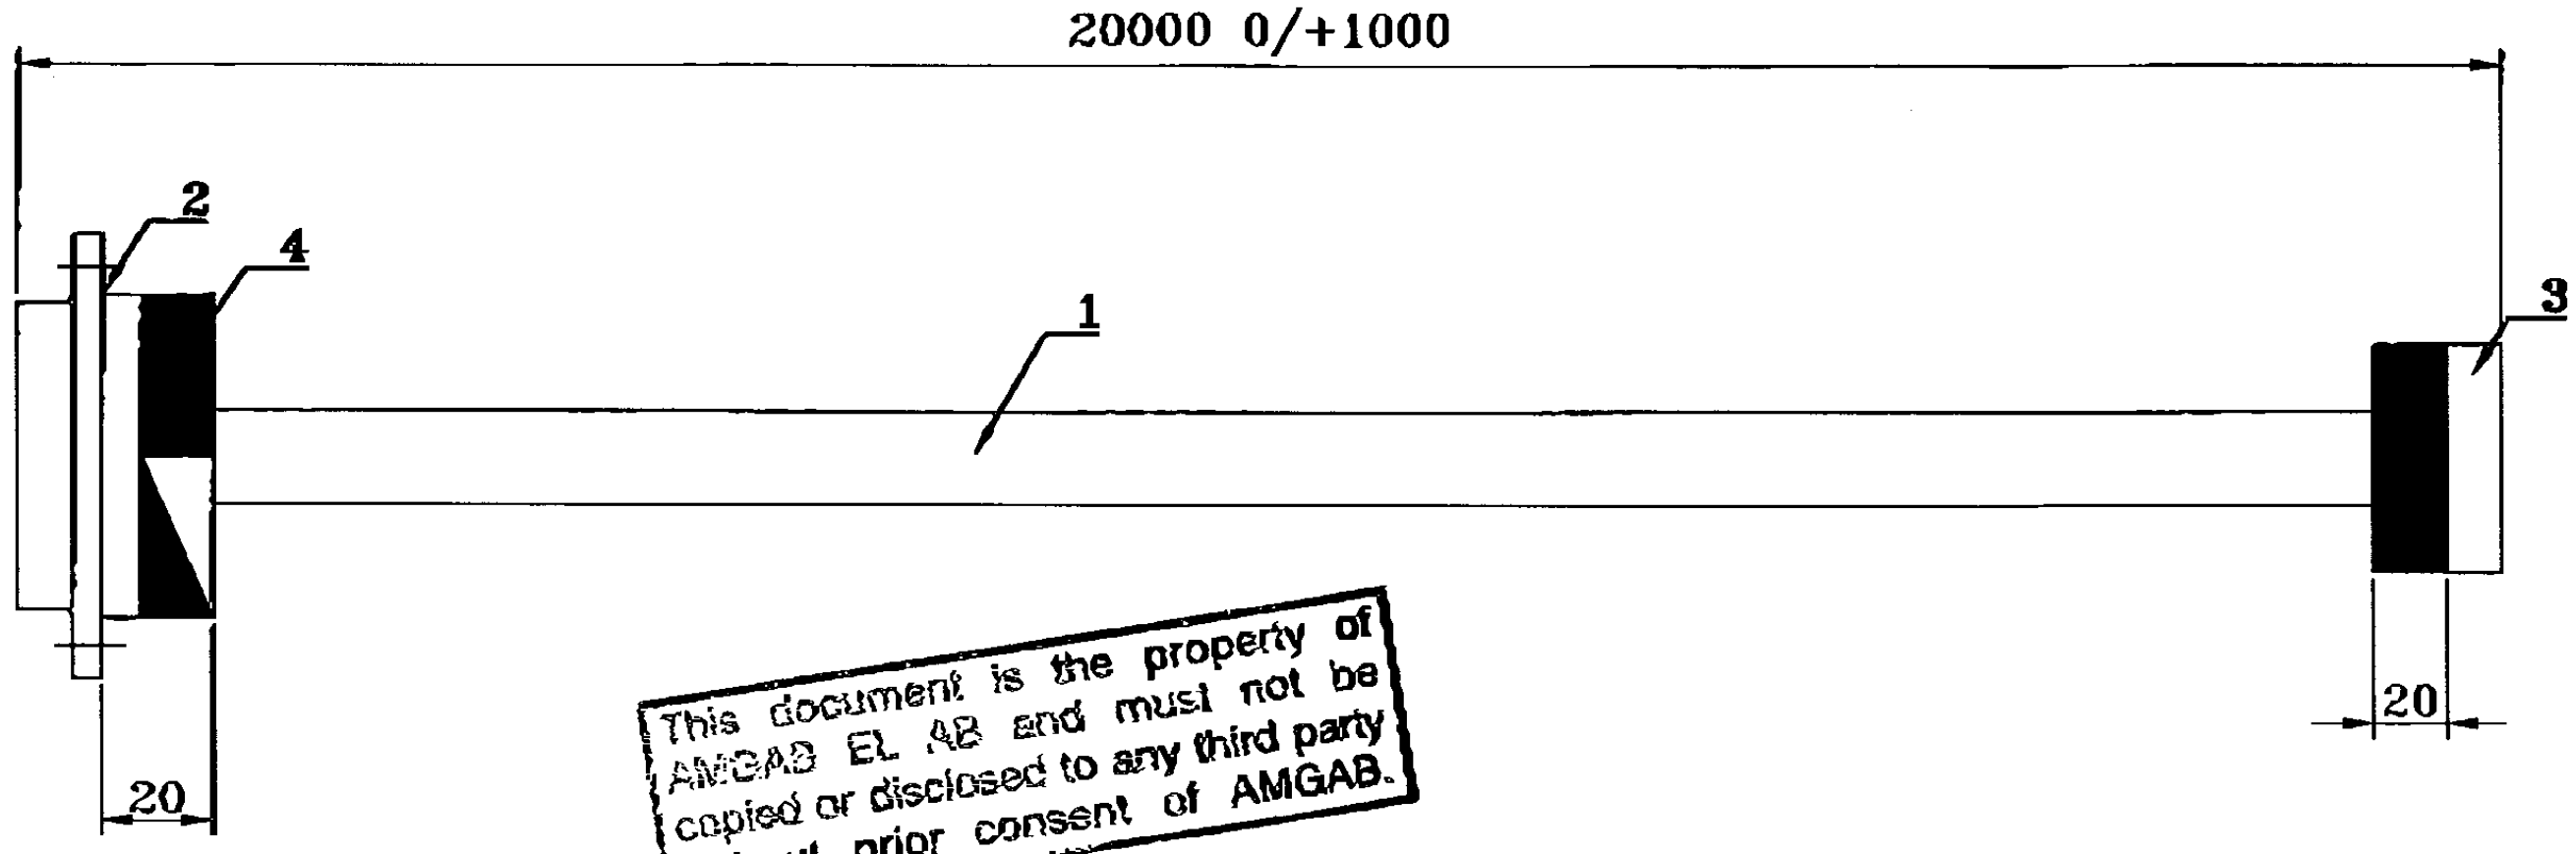

PARTS LIST :

1. Composite cable (2 x UHT 3207 LH) MAX 21 + drain wire
   See A7389A3
2. Connector µD 51 way male nickel plated DAP insert
3. Connector dual row female
4. Molding
5. Label on the µD connector's molding
   Text : "AXON' P/N
   Date : YY/WW
   Batch Nb/Serial Nb"

PRELIMINARY DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : d.

axon' CABLE & INTERCONNECT

AXON'CABLE SA
51210 MONTMIRAIL - FRANCE
TEL : +33 3 26 81 70 00
FAX : +33 3 26 81 28 83
www.axon-cable.com

CUSTOMER N°
****

FILE N°
A7389A1.dwg

TITLE :
HARNESS 1

SIZE A4

SCALE :

AXON'SA N°
A7389A1

REV A Prod. Doc.

SHEET 1 of 1

REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
A	CREATION	GT	SW	31/05/01

PRELIMINARY DRAWING

COMPOSITION :

1. 21 pairs of UHT 3207 LH
   Conductor
   Material : Silver plated copper
   Composition : AWG32 or 7x0.079 mm
   Diameter : 0.237 mm
   Section : 0.034 sqmm
   Resistance : 53 Ω/100 m nom.
   Insulation
   Material : Polyimid tape
   Coating : LiquidH
   Diameter : 0.34 mm
   Color of the twisted pair : white & black
2. Drain wire
   Silver plated copper AWG3207
3. Polyester/Aluminium Foil
4. Extruded Poliax

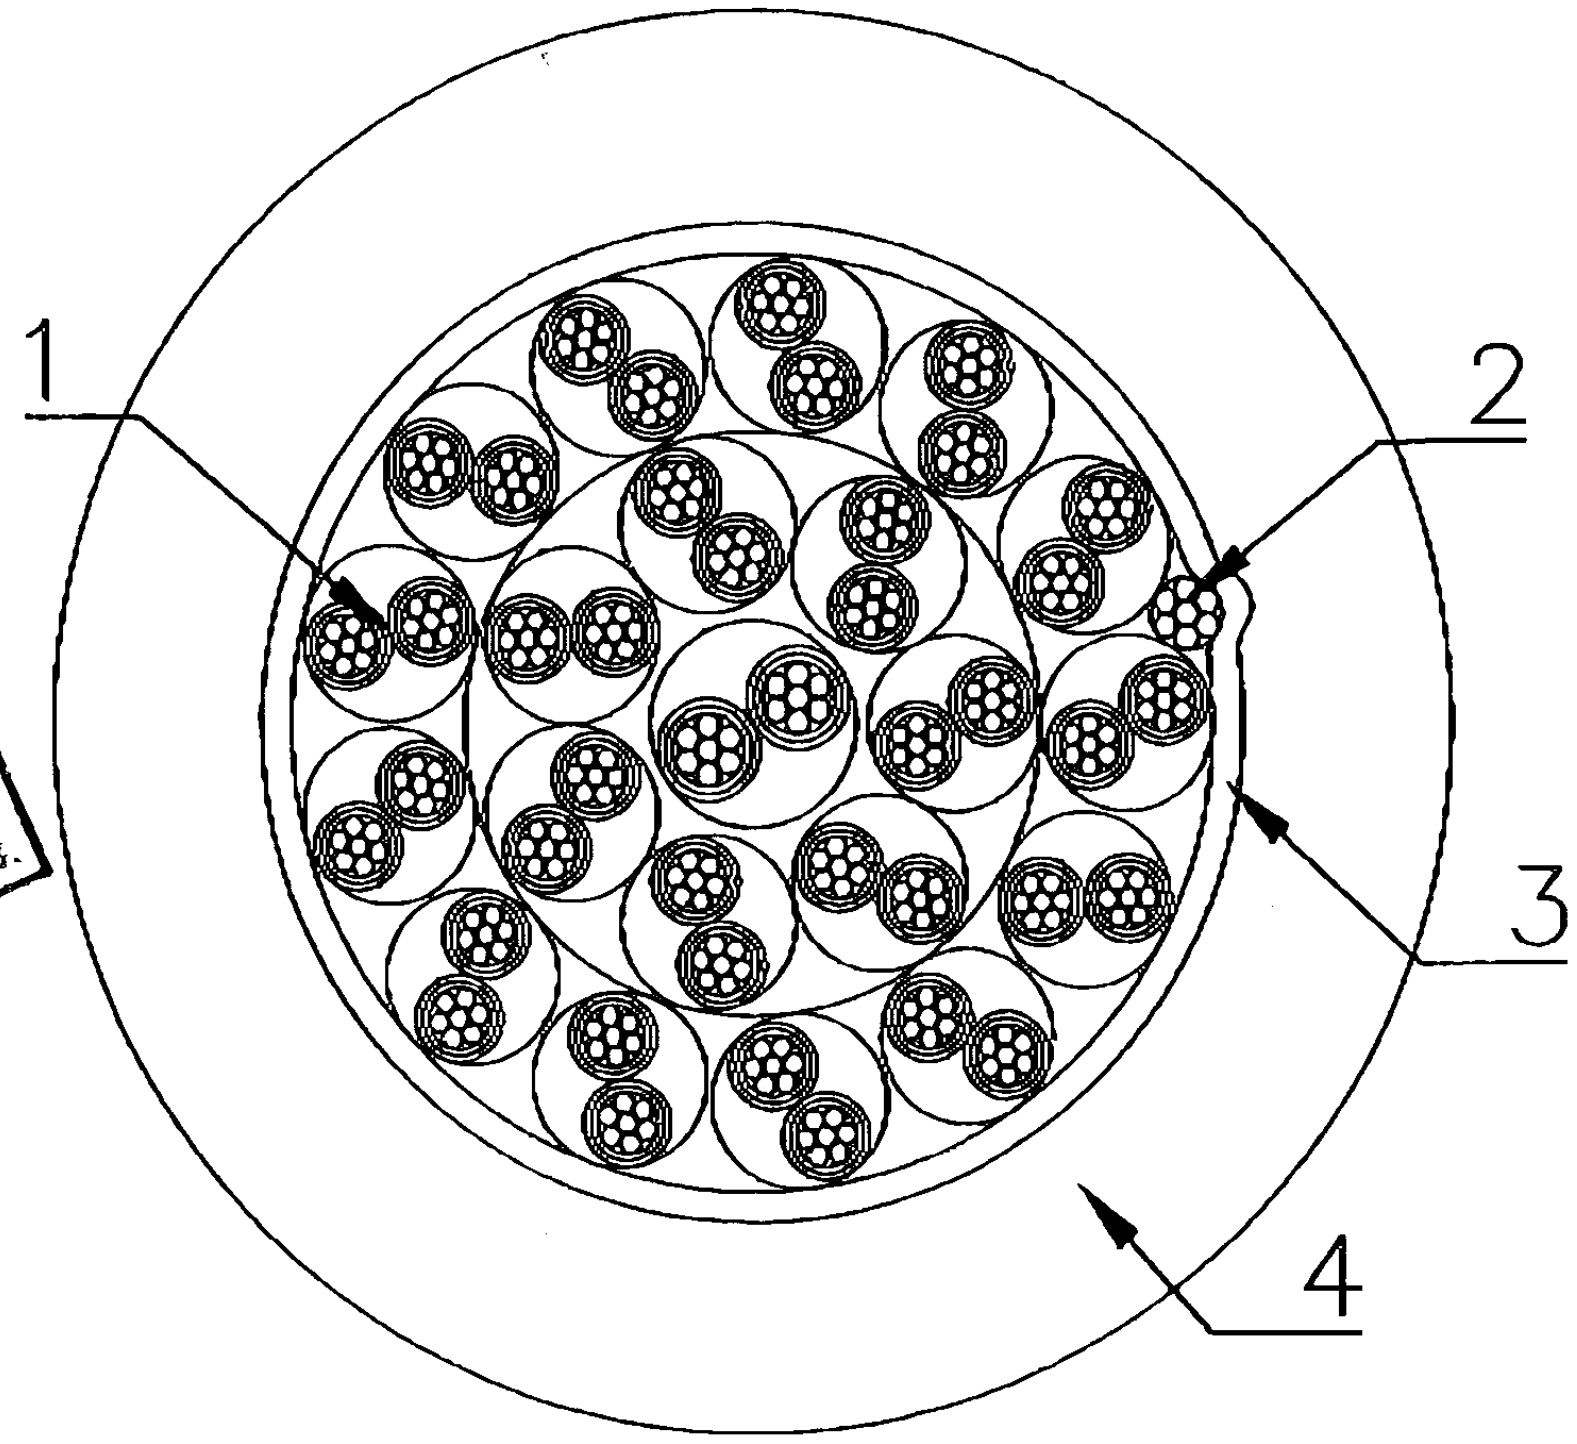

CHARACTERISTICS

Overall diameter : 4.65 mm nom – 5.00 mm max
Approx weight : 32 g/m
Voltage rating : 250 VAC
Temperature ratin : –50°C to +130°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : d.

axon' CABLE & INTERCONNECT

AXON'CABLE SA
51210 MONTMIRAIL - FRANCE
TEL : +33 3 26 81 70 00
FAX : +33 3 26 81 28 83
www.axon-cable.com

CUSTOMER N°: ****************

FILE N°: A7389A3.dwg

TITLE : (2 x UHT 3207 LH) MAX 21 + drain

SIZE: A4 | AXON'SA N°: A7389A3 | REV: A Prod. | Doc.

SCALE: D. | SHEET 1 of 1